

CS-3 SERIES

E-RATED/MEDIUM VOLTAGE FUSES



HIGHLIGHTS:

- E-Rated
- UL Listed 5.5kV and 15.5kV
- Complies with ANSI C37.46



DEFINITIONS:

E-rating

E-rated fuses operate as follows:
 100E or less - must melt in 300 seconds (5 mins.) at 200 to 240% of E (ampere) rating.
 Over 100E - must melt in 600 seconds (10 mins.) at 220 to 264% of E (ampere) rating.
 Example - A 100E fuse must melt in 300 seconds with an applied current of 200 to 240 amperes.

General Purpose Current-Limiting Fuse

A general purpose current-limiting power fuse is one that is capable of interrupting all currents from its rated interrupting rating down to the current that causes melting of the fusible element in one hour.

APPLICATIONS:

- Protection for 5.5, 8.25
- or 15.5kV transformers or distribution system.

5kV, 8kV and 15.5kV FERRULE MOUNTED FUSES

Amp-trap® CS-3 E-rated 5kV 8kV and 15kV fuses have 2 or 3 inch diameter barrels with ferrules and are mounted in spring reinforced clips. They are UL listed as “general purpose current-limiting fuses” and are for use indoors (or outdoors in a weatherproof enclosure). The unique time-current characteristic of Ferraz Shawmut E-rated fuses allows them to be closely sized to transformer full-load rated current, as recommended by IEEE guidelines, without being affected by normal magnetizing inrush current. CS-3 fuses are typically sized at transformer rated current of 133%, thereby providing superior overall protection.

Features/Benefits

- **UL Listed** for compatibility with UL listed equipment
- **Ferrule mounting** for standard clips and interchangeability with other brands of fuses
- **Current Limiting** for superior equipment protection
- **Blown-fuse indicator** gives positive identification of open fuse
- **Non-venting** for silent operation
- **Metal Embossed Catalog Number** and manufacturing date for lasting identification

Ratings

- **A055F**
AC: 5E to 450E
5.5kV, 63kA I.R. Sym.
- **A825X**
AC: 10E to 200E
8.25kV, 50kA I.R. Sym.
- **A155F**
AC: 5E TO 200E
15.5kV, 50kA I.R. Sym.

Approvals

- UL Listed to JEEG, “Fuses Over 600 Volts”
UL File # E143362

Spring-Reinforced Clips for CS-3 Fuses:

228-700-530 (One pair of clips)
 For 3" Diameter, 2 barrels max.

CS-3

E-RATED/MEDIUM VOLTAGE FUSES/A055F

5.5kV Ferrule Mounted

Catalog Numbering System

A	0	5	5	F	1	D	0	R	0	-	1	0	0	E
											Ampere Rating			
											Revision/No.			
											Special Features			
											Diameter (C=2", D=3")			
											No. of Barrels			
											Style (F=Ferrule Mount)			
											Max. Voltage Rating (055=5.5kV)			
Amp-trap Fuse														

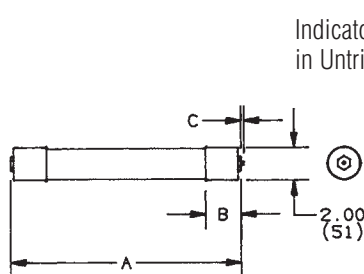


Figure A

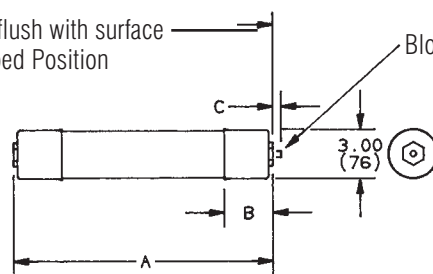


Figure B

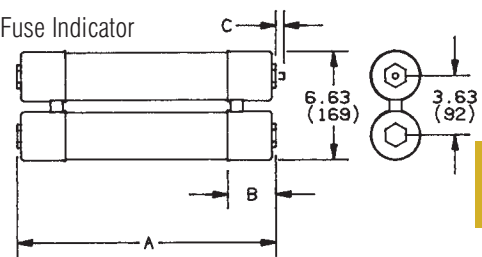


Figure C

Catalog Numbers, Ratings, Dimensions, CS-3 Series, 5.5kV



NEW CATALOG NUMBER	OLD CATALOG NUMBER	AMPERE RATING	NUMBER OF BARRELS	FIG.	DIMENSIONS Inches (mm)			INTERRUPTING RATING RMS SYM.* AMPERES
					A	B	C	
5.5kV Max. – Ferrule Mounted Style – 12” (305mm) Clip Centers – 2” (50.8mm) Barrel Diameter								
A055F1CORO-5E 7E 10E 15E 20E 25E 30E 40E 50E 65E	A550X5E-1B 5E 7E-1B 10E-1B 15E-1B 20E-1B 25E-1B 30E-1B 40E-1B 50E-1B 65E-1B	5E 7E 10E 15E 20E 25E 30E 40E 50E 65E	1	A	14.11 (358)	2.2 (56)	.19 (4.8) Tripped Force 1 lb.	63,000
5.5kV Max. – Ferrule Mounted Style – 12” (305mm) Clip Centers – 3” (76.2mm) Barrel Diameter								
A055F1DORO-10E 15E 20E 25E 30E 40E 50E 65E 80E 100E 125E 150E 175E 200E A055F2DORO-250E 300E 350E 400E 450E	A550X10E-1F 15E-1F 20E-1F 25E-1F 30E-1F 40E-1F 50E-1F 65E-1F 80E-1F 100E-1F 125E-1 150E-1 175E-1 200E-1 250E-1 300E-1 350E-1 400E-1 450E-1	10E 15E 20E 25E 30E 40E 50E 65E 80E 100E 125E 150E 175E 200E 250E 300E 350E 400E 450E	1	B	15.88 (403)	3.0 (76)	0.5 (13) Tripped Force 2 lbs.	63,000
			2	C				

* RMS ASYM. AMPERES = RMS SYM. AMPERES x 1.6

CS-3

E-RATED/MEDIUM VOLTAGE FUSES/A055F


A055F1COR0 – 5E to 65E

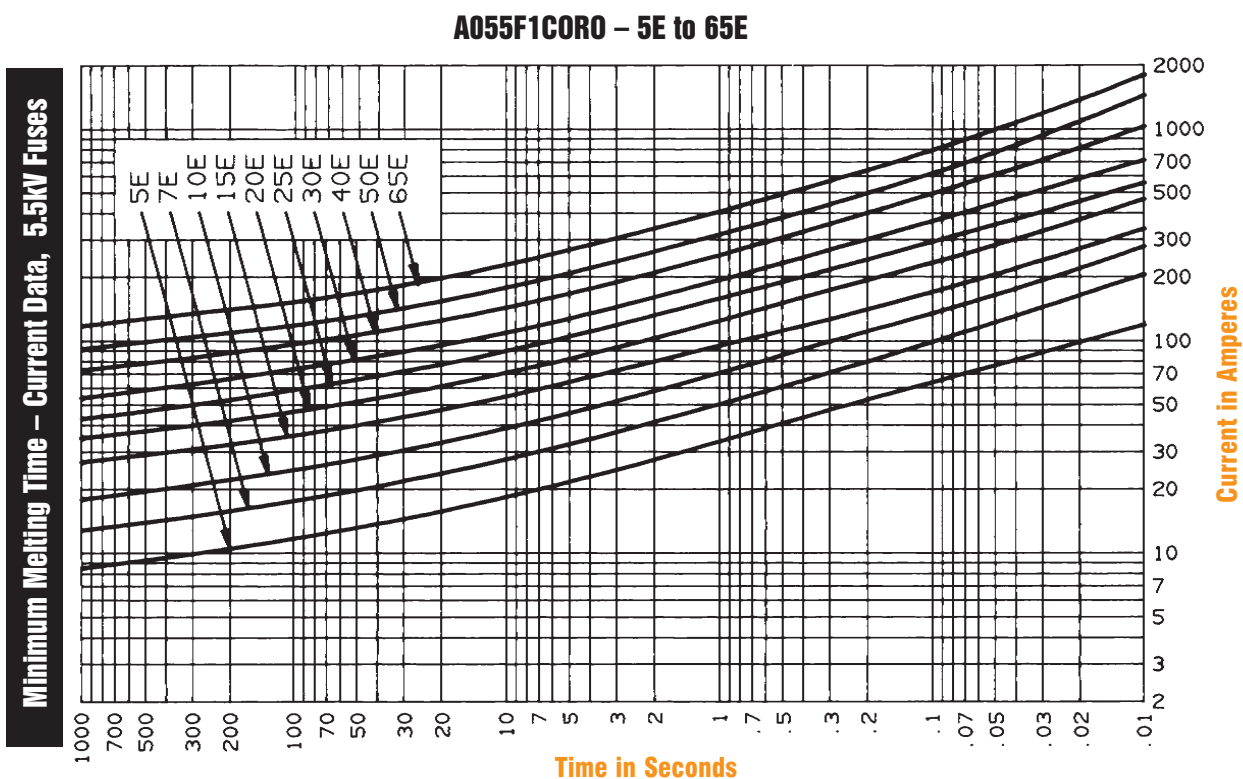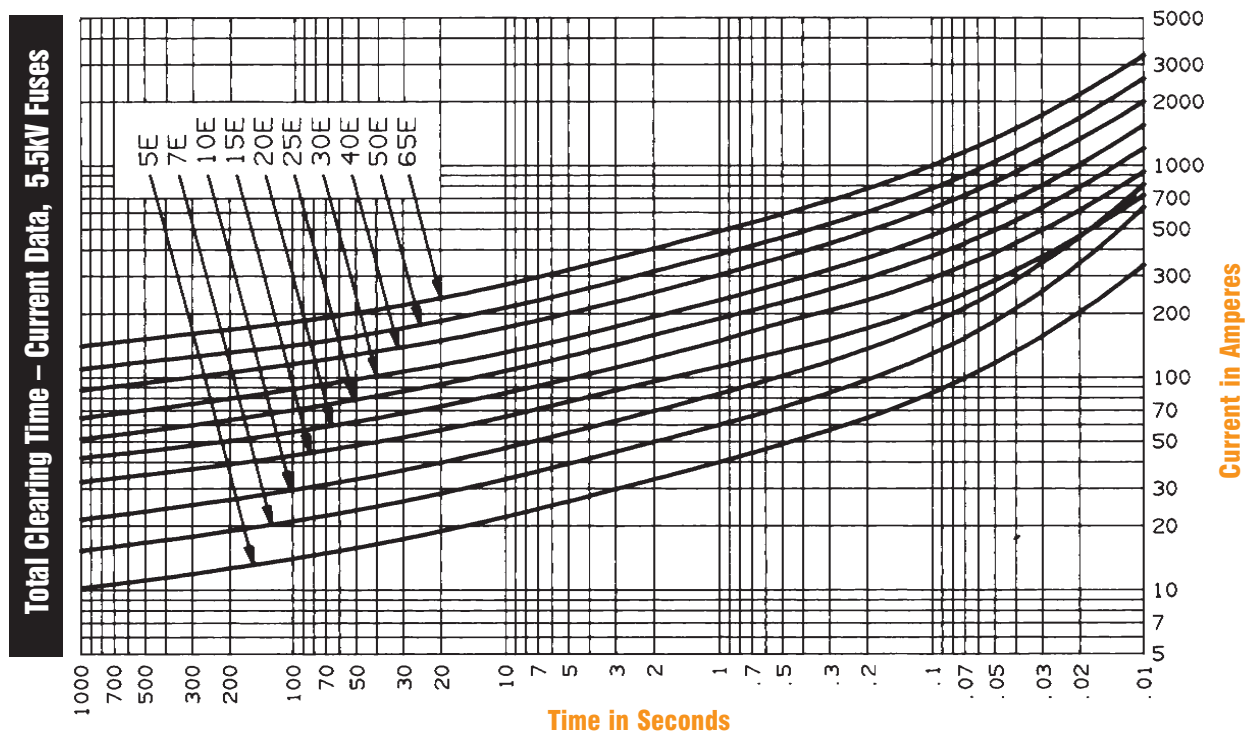

CS-3


E-RATED/MEDIUM VOLTAGE FUSES/A055F

Total Clearing Time – Current Data, 5.5kV Fuses

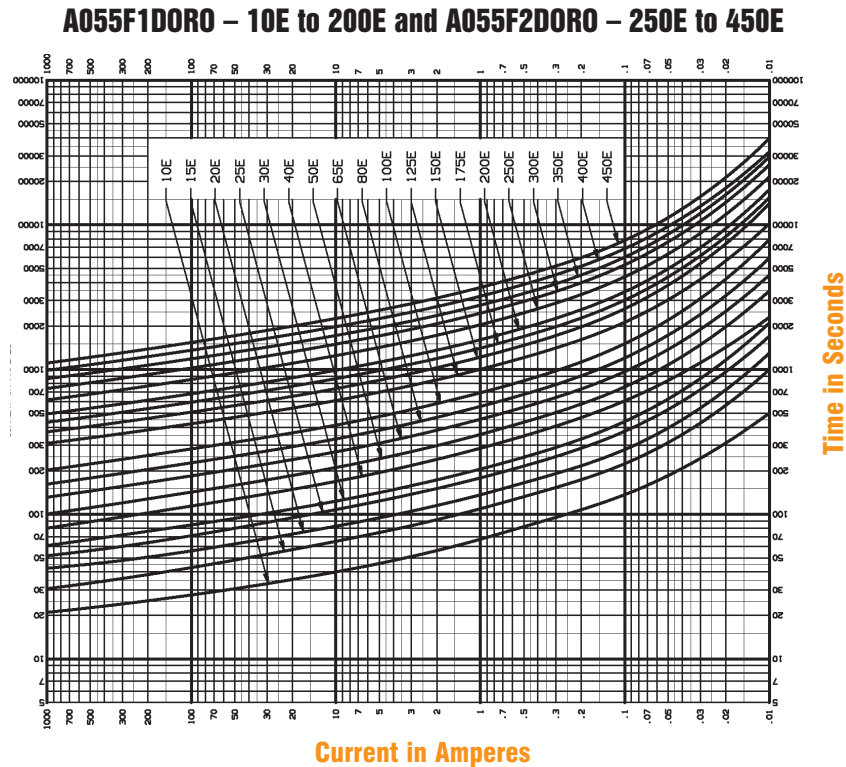

E


Minimum Melting Time – Current Data, 5.5kV Fuses

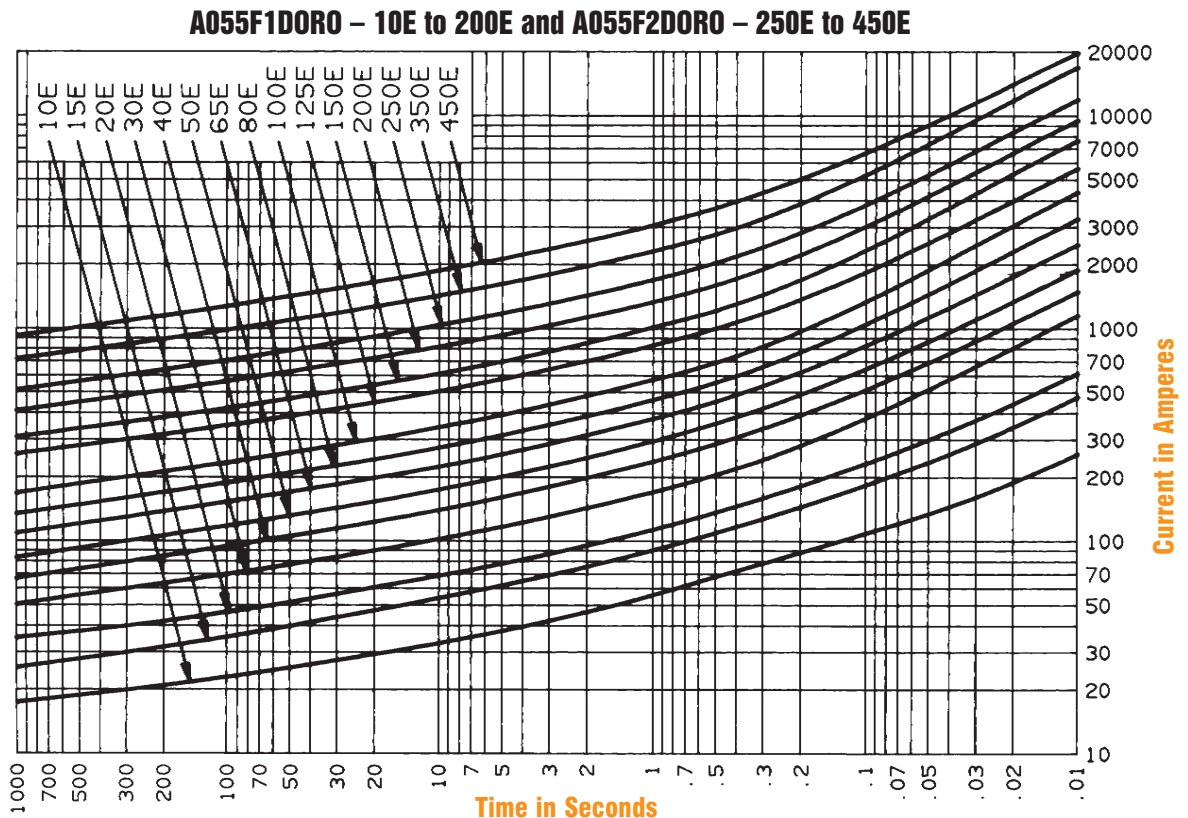


CS-3

E-RATED/MEDIUM VOLTAGE FUSES/A055F

A055F1C0R0 – 5E to 65E

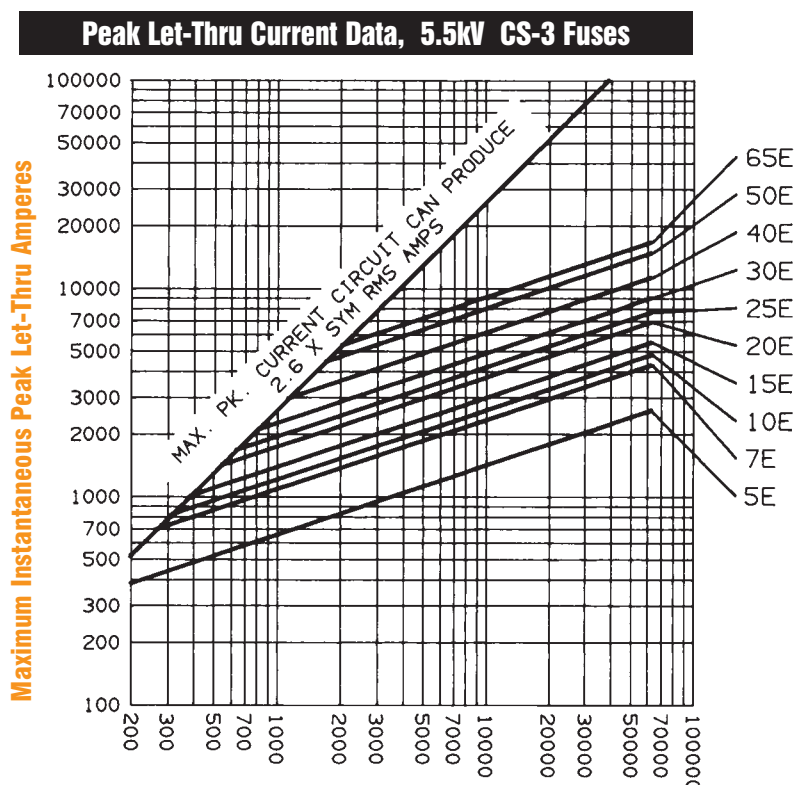

Available Current in RMS Symmetrical Amperes
A055F1D0R0 – 10E to 200E and A055F2D0R0 – 250E to 450E

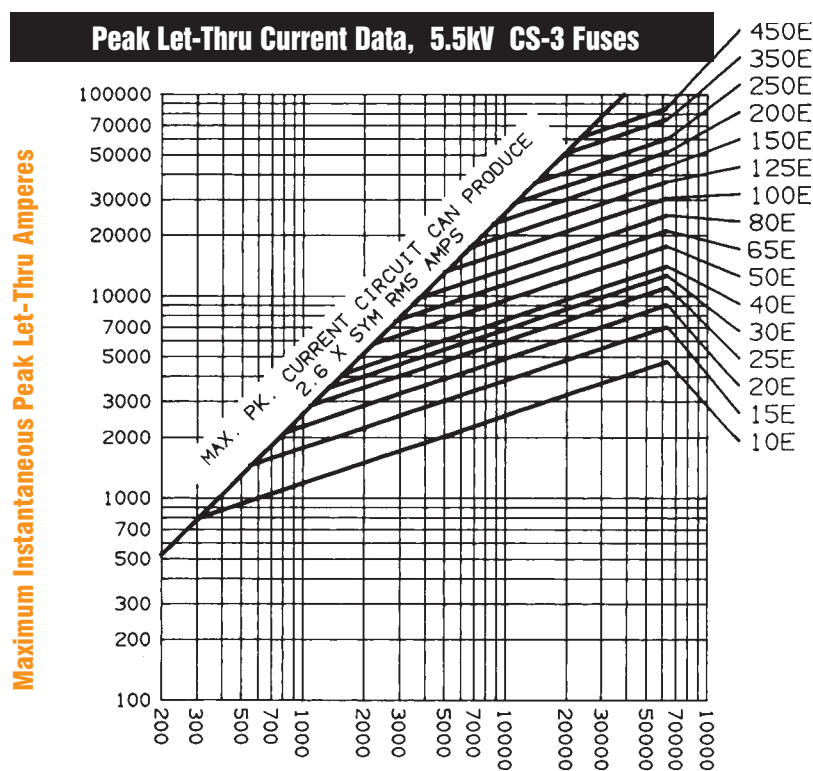

Available Current in RMS Symmetrical Amperes