

FUSEHOLDERS

FOR MICRO™ FUSE PLUG-IN FUSES

RF SHIELDED FRONT AND REAR PANEL MOUNT TYPE

Radio frequency shielded space saving design holds FAM and FAMC fuses. Screw-on knob has drip-proof design allowing use when moisture exists at front of panel.

Rated at 5 amperes up to 125 volts.

Mounting: Front - maximum panel thickness .093".
Rear - maximum panel thickness .125".

Housing, knob and nut: Aluminum, untreated, chromate finish for RF shielding.


Mounting Gasket: Neoprene or conductive silicone.

Seal: Buna "N" O-ring inside the knob.

Terminals: Beryllium copper. Silver plated.



H

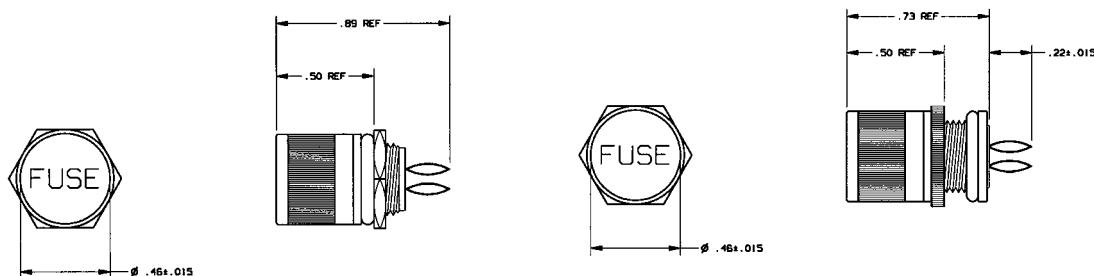

CATALOG NO.	GASKET TYPE
MFH1	Neoprene
MFH7	Conductive

CATALOG NO.	GASKET TYPE
MFH2	Neoprene
MFH8	Conductive